




999.00 EUR
incl. 19% VAT, plus [shipping](#)

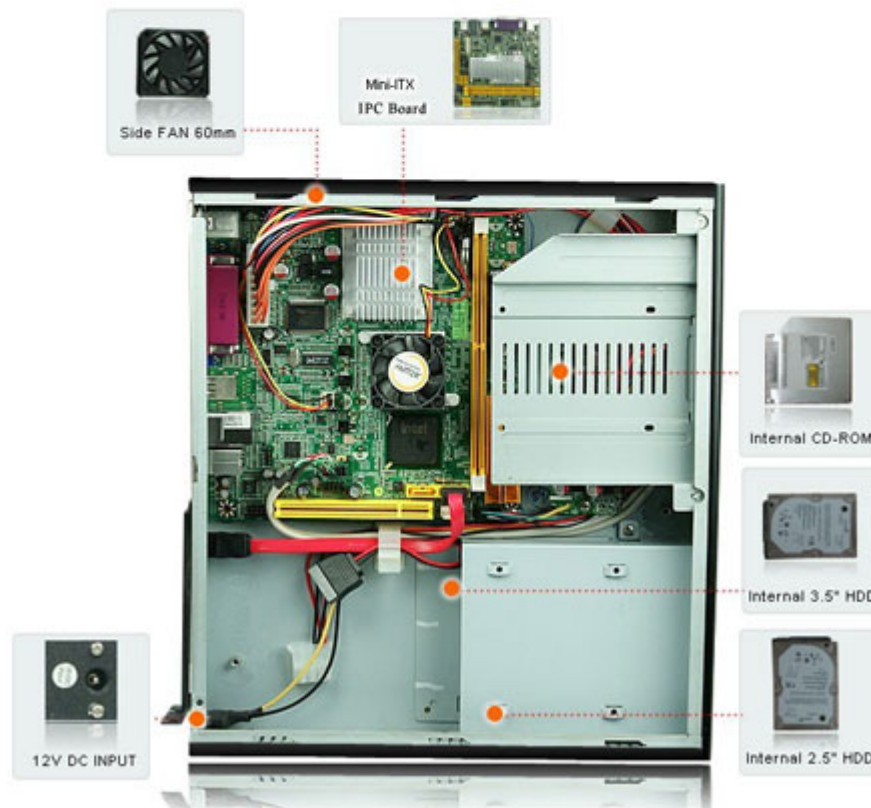

- INTEL® Atom D525 + NM10 Chipset
- INTEL ® Atom Dual-Core Processor D525
- Support 2 * 3Gb/s SATAII
- Support 2 * DDR3 800MHz Single CH SO-DIMM up to 4GB
- Supports 1 * Gigabit LAN
- Integrated ALC662 HD Audio CODEC with 6-CH
- Support Watch dog Technology
- Support CPU Smart FAN
- WI-FI wireless card support (JBC110C9I-52W-B only)
- Energy Efficiency Pioneer
- Easy to use

Model No	JBC110C9I-525-B / JBC110C9I-52W-B
Motherboard Specification	
CPU	INTEL ® Atom Dual-Core Processor D525 (45nm,1.80GHz,1024MB L2 Cache)
Chipset	INTEL® Atom D525 + NM10
Memory	2 * DDR3 800MHz Single CH SO-DIMM up to 4GB

• Expansion Slots	• 1 * PCI slot, 1 * Mini PCI-E socket
• LAN	• 1 * Realtek RTL8111EVL Gigabit LAN
• Audio	• Realtek ALC662 6-Channel HD Audio CODEC
• Storage	• 2 * Serial ATAII 3Gb/s connectors
• USB	• Embedded 7 * USB 2.0/1.1
• BIOS	• AMI 8MB DIP Flash ROM
• Form Factor	• Mini-ITX Form Factor, M/B 170 x 170mm
Barebone Specification	
• Product size	• 273(W) x 300(D) x 65(H)mm
• Specs Exposed	• 1 x Slim ODD Drive Bay (Optional: 1 x 2.5" Drive Bay) • Hidden: 1 x 3.5" HDD Drive Bay and 1 x 2.5" HDD Drive Bay
• Wireless LAN	• 802.11b/g/n draft Wi-Fi wireless LAN connection (JBC110C9I-52W-B only)
• Colors	• Black Color
• Cooling Fan	• Side: 6cm Fan x 1
• Front I/O Port	• 2 x USB(V2.0),
• Rear I/O Port	• 4 * USB 2.0/1.1 ports • 1 * PS/2 Mouse & Keyboard connector • 1 * RJ-45 ports • 3 * Audio I/O ports (Line-in, MIC and Line-out) • 1 * VGA port • 1 * COM port • 1 * Parallel port • 1 * 12V DC in connector • 1 * WI-FI Antenna hole
• Power supply	• Onboard 12V DC-IN Power
• Standard Accessory	• 60W AC-DC Adapter x1 • Power Cord x1 • Wall Mount x2 • 1 x WI-FI Antenna (JBC110C9I-52W-B only) • 1 x SATA-SLM ODD Cable + Power • CD x1 • Manual x1
• Functional	• ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation
• Packing	• Color Box Dimension■426(W) x 137(D) x 378(H)mm • Gross Weight■4.385KG • Net Weight■3.70KG
• Certificate	• CE,FCC RoHS For Barebone • CE,FCC,TUV,UL,CCC,CB For Power Adapter