


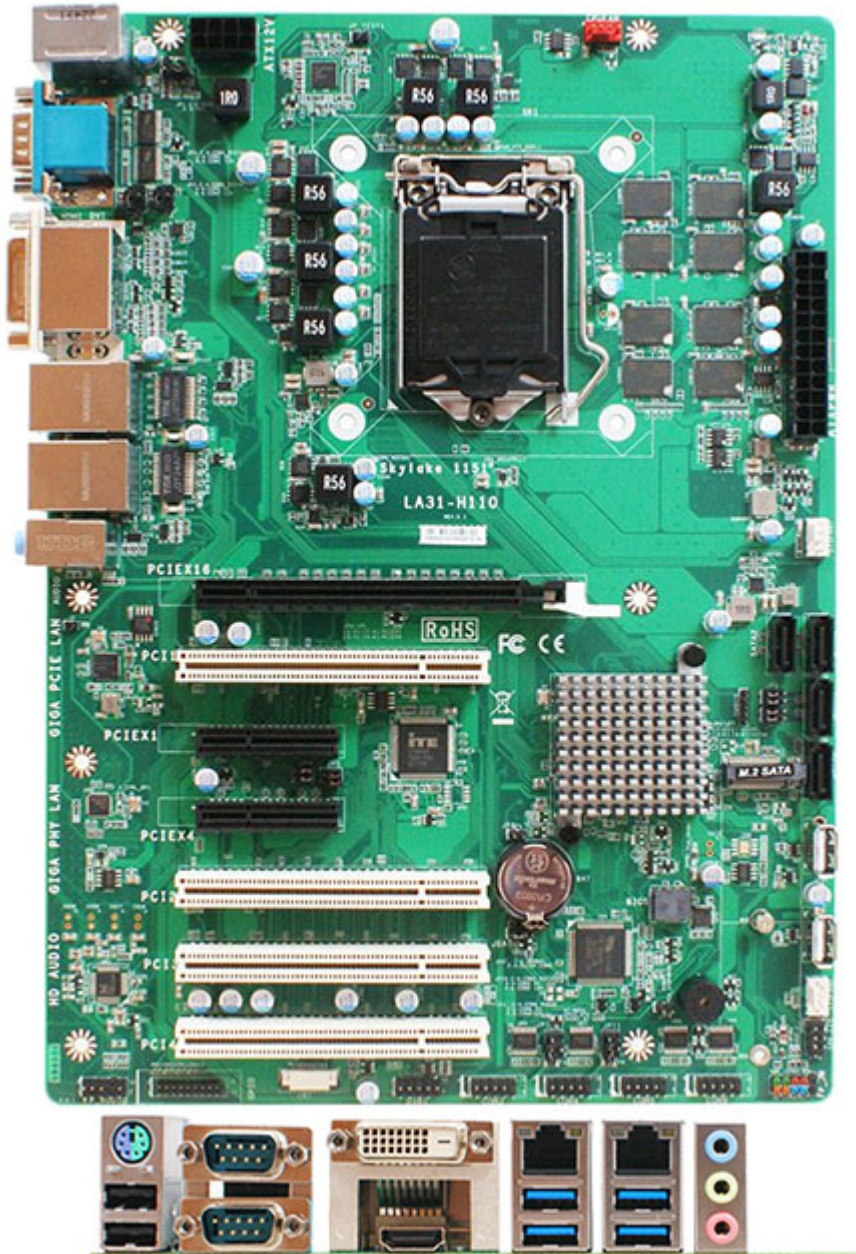

349.00 EUR

incl. 19% VAT, plus [shipping](#)

- H110 !
- 2x COM !
- ATX Formfactor !
- 8GB RAM !

- 1. Intel® LGA1151 Socket supports 6/7th Gen Core Processor
- Intel® Sky Lake-S H110
- On board 8GB DDR4 Dram (Max 16GB)
- 1* Intel® i225-V 2.5GbE, 1* Intel® i219-LM GbE
- 1* M.2 M-Key (2242/2280,SATAIII)
- 4* SATA III (6Gb/s,SATA4 Co-lay M Key)
- 1* DVI-D, 1* HDMI, Output
- 2* RS232/422/485, 4* RS232, 4* USB3.0, 6* USB2.0
- 16bit GPIO
- Support Onboard TPM2.0 (option)
- 24 + 4 Pin ATX Power Input
- ATX Form Factor (305x220mm)

Model	– LA31-H110-8G / LA31-H110-16G – LA31-H110-8G2 / LA31-H110-16G2(TPM2.0)	
Form Factor	– ATX (305 * 220mm)	
Processor System	– Intel® LGA1151 Socket supports 6/7th Gen Core Processor – Intel® Sky Lake-S H110 Chipset – AMI 128M Flash ROM	
Memory	– On board 8GB DDR4 (Max 16GB)	
Storage	– 1* M.2 M-key (2242/2280, SATAIII interface) – 4* SATAIII (6.0Gb/s, SATA4 Co-lay M key)	
Expansion	– 1* PCI-Ex16 slot – 2* PCI-E x4 slots(PCIE1 Interface :PCI-Ex1)	
Ethernet	– 1* Intel® i225-V 2.5GbE – 1* Intel® i219-LM GbE	
Graphics	– Intel® HD Graphics, shared Memory – 1* DVI-D (Max Resolution : 2560×1600@60Hz) – 1* HDMI 1.4 (Max Resolution : 4096×2304@24Hz) – Support Dual Displays	
Audio	– HD Audio: REALTEK ALC662-VD/ALC897GR	
Watchdog Timer	– From Super I/O to drag RESETCON# – 256 segments (10sec ~ 255min)	
Internal I/O	– 4* USB2.0 (2*USB2.0 for Type A) – 4* RS232 (COM3/4 Support 5V/12V TTL) – 4* SATAIII (6.0Gb/s, SATA4 Co-lay M key) – 1* M.2 M-key (2242/2280, SATA interface) – 1* PCI-Ex16 slot – 2* PCI-Ex4 slot (PCIE1: PCI-Ex1 interface, PCIE2■PCI-Ex4 or PCI-Ex1) – 1* GPIO (16 bit,5V) – 1* CPU FAN (W/ Smart FAN) – 2* System FAN (W/O Smart FAN) – 1* Speaker + Power LED – 1* Chassis intrusion – 1* SMBUS/ I2C – 1* AT mode	
External I/O	– 2* RS232/422/485 (Support 5V/12V TTL) – 4* USB3.0 – 2* USB2.0 – 1* PS/2 – 1* DVI-D – 1* HDMI1.4 – 2* RJ45 – 1* 3JACK	
Power	24 + 4 Pin ATX Power, AT/ATX Supported – AT: Directly PWR on as Power input ready – ATX: Press Button to PWR on after Power input ready	
Compliance	– CE, FCC, RoHS, REACH compatible (Option)	
Temperature	– Operating Temperature: 0 ~ 60° C – Storage Temperature: -20 ~ 70° C – Humidity: 10% ~ 90% RH @40°C (non-condensing)	
OS Support	– Windows 7/ 10, Windows 11(TPM2.0), Linux	